

OFFICE OF THE MARION COUNTY SURVEYOR

SECTION RECORD CORNER

SECTION 32 TOWNSHIP 16 RANGE 5

DATE: 11-20-07

PARTY CHIEF: Wilcoxon

CREW: _____

TYPE OF MARKER: Harrison


METHOD OF ESTABLISHMENT: County: 7-19-02

IN. S.P.C. E ZONE NAD '83

NAME: 16053207

N: 503373.2740(m)

E: 70662.5440(m)

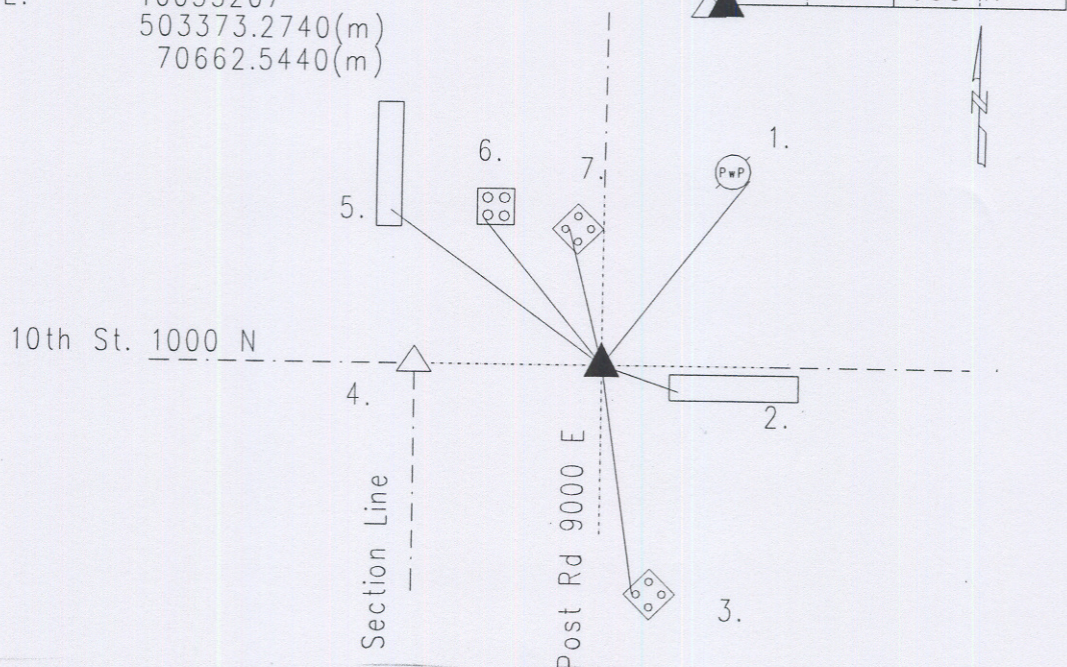

Corner originally set as a post in 1820 by John Hendricks with the following witnesses: 18" white ash bearing north 62 degrees, thence west 18 links; and a 14" dogwood bearing south 28 degrees, thence west 19 links. (Marion County Atlas p. 15) A survey by D.B. Hasbrook on May 23, 1850 indicates no stone but the following witnesses: 18" red oak bearing north 14 degrees, thence east 58 links; and a 36" elm bearing south 64 degrees, thence east 33 links. (Warren Legal Book p. 13) A survey by Wm. P. Smith on June 10, 1869 indicates the same witnesses as the previous survey. (Warren Legal Book p. 39) Corner referenced by Monroe on 3/1/58 and called a stone. Corner referenced by Burres on 8/19/64 and called a stone. Corner referenced by Day on 7/7/69 and called a stone. Corner referenced by Straber on 12/27/71 and called a stone under p.k nail. Corner referenced by McIand on 7/24/72 and called a stone 10" down. Corner referenced by Fortnon on 2/25/75 and called a cut "x" in concrete. Corner referenced by Gries on 12/19/86 and called a cut 'x' in concrete. Corner referenced by Wilcoxon on 6/12/90 and called a cut 'x' in concrete. Corner referenced by Wilcoxon on 12/1/92 and called a cut 'x' in concrete. Corner excavated by Whiteside on 7/18/02 and a #205 cast iron Harrison Monument was set in position as the corner per GPS coordinates.

REF.	DISTANCE	DESCRIPTION
1.	47.79'	Mag nail w/bw SF PwP#25-521 3" up
2.	14.37'	Cut 'x' in concrete median
3.	47.39'	Cut 'x' W-bolt of signal pole base
4.	61.80'	Due W to Harrison for NW 5-15-5
5.	84.22'	Cut 'x' in concrete median
6.	60.07'	Cut 'x' SW bolt of light pole base
7.	42.65'	Cut 'x' W-bolt of signal pole base